

# P O T T E R Y B A R N

## Callia Glass Drop Sconce Med Assembly Instructions

### Important Safety Instructions:

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing fixture.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- We strongly recommend that a professional electrician install all direct wire fixtures.
- This fixture has been rated for up to **(2) 60-watt maximum standard Type B** bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.
- The lighting fixture is meant for Outdoor use, **SUITABLE FOR DRY LOCATIONS**. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- Save these instructions.

### Pre-assembly:

- For your safety and convenience, assembly by two people is recommended.
- Remove all parts and hardware from box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

**WARNING:** This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

### Parts Enclosed:

- (1) Circular mounting crossbar
- (2) 8/32" x 1" Mounting screws
- (1) Light fixture (A)
- (1) Cap (E)
- (21) Short crystal (D)  
(include 2 extra piece)
- (31) Long crystal (C)  
(include 3 extra piece)
- (1) Finial with crystal ball (B)

### Hardware Included:

- (1) Green ground screw
- (3) Plastic wire connectors
- (4) Mounting plate screws (include 2 extra piece)

### Tools required for assembly:

- A properly wired ceiling junction box in desired location
- Hex wrench
- Phillips screwdriver
- Pliers
- Wire Cutters
- Electrical tape


### Preparing the light fixture:

1. **SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!**
2. Carefully unpack all fixture parts and hardware and lay out on a clear workspace.
3. Remove existing fixture from ceiling (if applicable), including crossbar.

### Installation Instructions:

1. Hang short crystal (D) onto the light fixture (A).
2. Insert two 60-watt Type B bulbs (not included) to the socket of light fixture (A).
3. Place the cap (E) over the top of the light texture (A) properly.
4. Gently pull wiring out from ceiling junction box and allow to hang.
5. Determine which 2 of the 4 mounting screws fit your junction box properly. Use 2 mounting screws to attach the crossbar to the wall junction box. Tighten screws with a Phillips screwdriver.
6. Carefully inspect the light fixture's wires. The NEUTRAL FIXTURE WIRE is white. The HOT FIXTURE WIRE is black. The bare copper wire is the GROUND WIRE.

7. Attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the outlet box (usually green or bare wire). Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. If your outlet box **DOES NOT** have a GROUND WIRE, be sure to insert the green ground screw into the crossbar, and wrap the fixture's bare ground wire around the ground screw. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED!**
8. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white). Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
9. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black). Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED!**
10. Gently tuck the wire connections neatly into the wall junction box.
11. Raise the light fixture (A) to the wall covering the junction box, aligning the screw holes at the both side of crossbar with the holes of the back plate of light fixture (A). Secure the back plate of light fixture (A) to the junction box with two mounting screws by screwdriver, turning clockwise until fully tightened.
12. Screw the finial with crystal ball (B) onto the light fixture (A).
13. Hang long crystal (C) onto the light fixture (A).

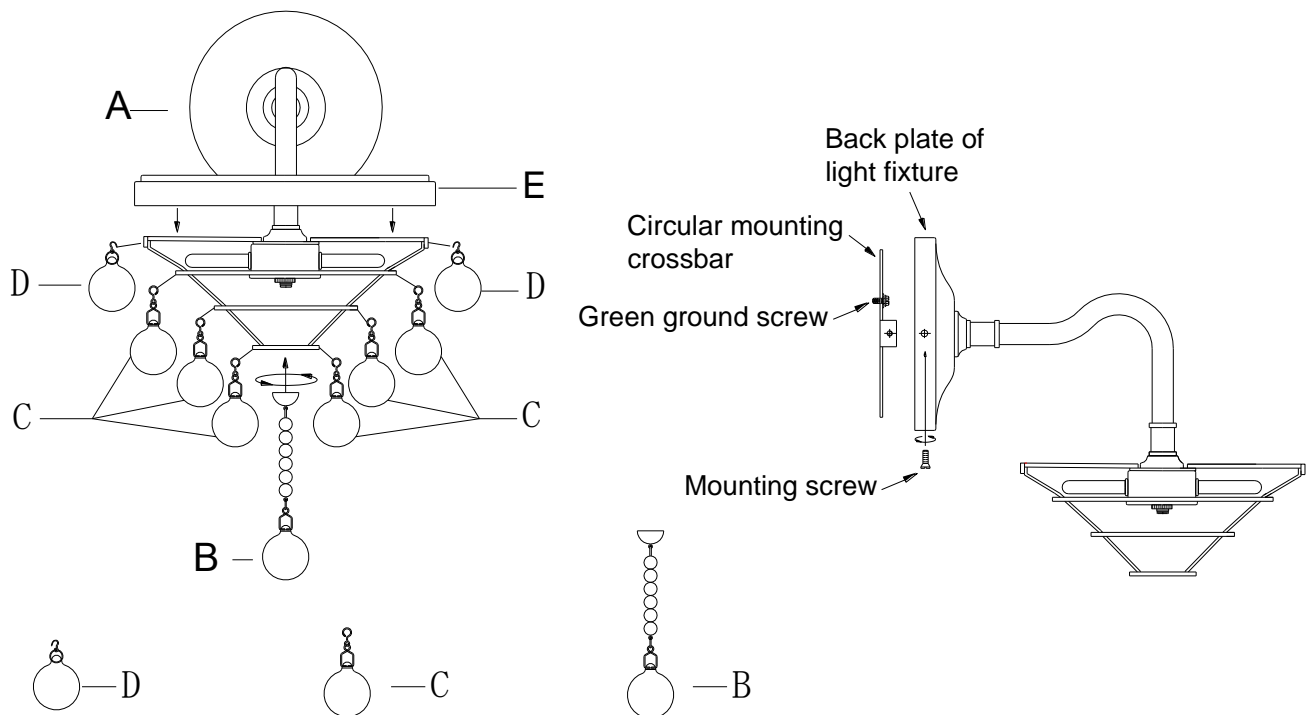

Care Instructions:

- Wipe clean using a soft, dry cloth or static duster.
- Avoid using harsh chemicals and abrasives as they may damage the finish.

Thank you for your purchase  
stores | catalog | [www.potterybarn.com](http://www.potterybarn.com)