

# P O T T E R Y B A R N

## Type Wall Hook

Note: For safe mounting, it is important to use the proper hardware for your wall type. Be sure to consult your local hardware store to determine the hardware needed for your wall type (plaster, drywall, concrete, etc.). Mount to wood studs whenever possible. Note: For stud mounting the anchors are not required, use only the screw of the hook.

**Note: MAXIMUM TOTAL WEIGHT CAPACITY IS 20 POUNDS (9.1 KG).**

### Parts and Hardware Included:

- |                     |                  |
|---------------------|------------------|
| (2) Metal screws    | (1) Back plate   |
| (2) Dry wall anchor | (1) Hex screw    |
| (1) Wall hook       | (1) Allen wrench |

### Mounting Instructions:

1. Hold the hook at desired location. With a pencil, mark on the wall the screw-hole location. The marks are used to determine the location of the mounting hardware.
2. Remove the hook from wall.

### For dry wall mount


3. Use a Phillips screwdriver to insert the wall anchor. Align the tip of the anchor over the mark and rotate the anchor into the wall, turning the screwdriver clockwise and pressing the anchor gently into the wall. Continue rotating the anchor until the flange of the anchor meets flush with the wall.
4. Insert the screw over the back plate by hand (clockwise) until the screw is tight (caution: do not over tighten the screw).
5. Mount the wall hook on the wall. Secure by tightening hex screw with Allen wrench.

### For stud mount :

6. If the desired location for this hook aligns with a stud, do not use the anchor. Simply use a Phillips screwdriver (or drill) to insert the screws over the back plate on the marks.
7. Attach mounting plate and secure by tightening hex screw with Allen wrench.

### Care Instructions:

Wipe with a soft, dry cloth. To protect the finish, do not use household cleaners or abrasives.

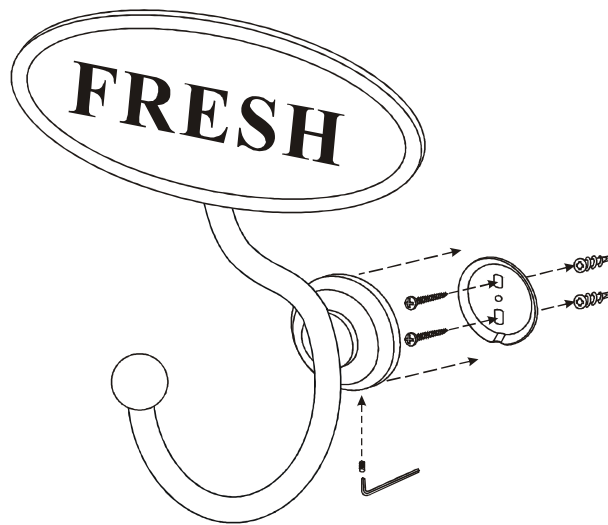

*thank you for your purchase*

stores | catalog | [www.potterybarn.com](http://www.potterybarn.com)