

# P O T T E R Y B A R N

## Display Wall Cube Single Mounting instructions

**Tools:** Level, Philips Screwdriver, Stud-Finder

**Hardware:** (12) Allen Screws, (1) Allen Key  
(4) Snap Screws (4) Screws

The hardware included with this item is meant for drywall or stud mounting only. If your walls are made from concrete, brick or plaster, please consult your local hardware store for assistance in selecting the appropriate hardware.


**Parts Included:** (2) Wooden Shelf (A & B)  
(2) Metal Square Frame (C & D)  
(2) Metal Strip (E & F)

**Max Load:** Maximum total weight capacity for this product is 40 pounds (18.1 Kg).


This item includes four mounting through-holes, which are used to receive screws for mounting the item to the wall.

### Assembly Instruction:


**Step 1:** Place Metal Square Frame (C) vertically on the floor as per illustration such that its through holes matches allen screws holes to the wooden shelf (A) Insert allen screws and tight with the help of allen key provided.

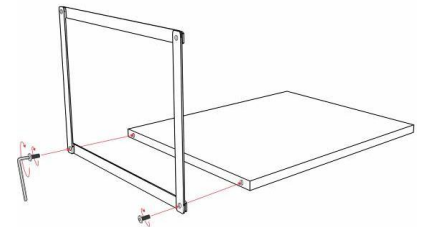

**Step 2:** Now, match wooden shelf (B) at the top of the metal frame (C) so that its through holes matches to the allen screw holes of wooden shelf (B) as per the illustration Insert allen screws and tight with the help of allen key provided.

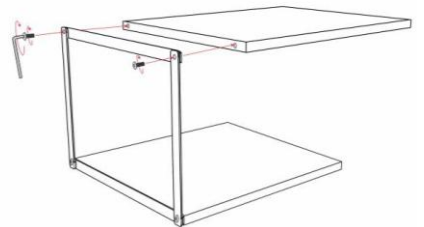


**Step 3:** Now, place the Metal square frame (D) at other end of attached shelves as per the illustration such that its allen screw holes matches to the through holes of square frame (D) Insert allen screws and tight with the help of allen key provided.

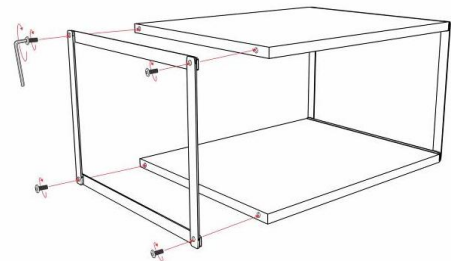


**Step 4:** Now, attach Metal Strip (E & F) at the back of the shelves as per illustration insert allen screw and tight with the help of allen key provided.

### Mounting Instructions:


- 1) Hold the item upright and level against a wall at the desired mounting location. Use one of the provided screws to mark the wall through each through-hole and then set the item aside.
- 2) If either of the four marks of Step (1) aligns with a wall stud (use a stud-finder to determine this), use a screwdriver to secure a screw at this mark directly into the wall and stud when instructed to do so below. Do not use a provided anchor at this stud location because the anchor cannot penetrate wood.

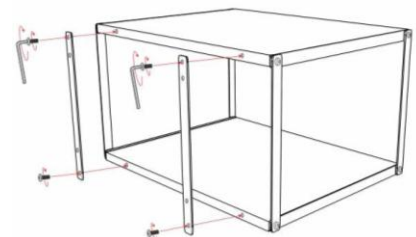

- 3) For each mark that does not align with a stud, use a Phillips screwdriver to install an anchor into the wall. To do this, position the tip of the anchor against the wall at the mark and then firmly push the anchor into the wall as you rotate it clockwise. The anchor is designed to drive itself into the wall as it is rotated. Continue rotating the anchor until the wide end becomes even with the surface of the wall.

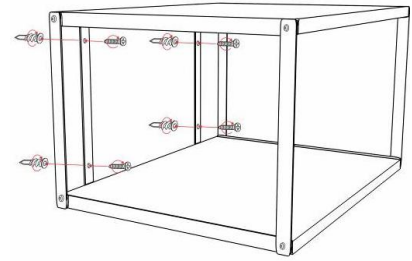

- 4) With the help of another person, hold the item upright and against the wall so that the four through holes align with either a stud-aligned mark or an installed anchor. Use a screwdriver to secure a provided screw through each through hole and into the wall or an installed anchor. Rotate the screw clockwise until tight.

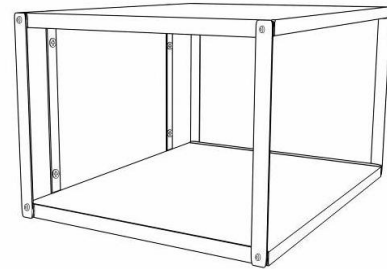

- 5) Installation complete!

**Care Instructions:**

To clean: Wipe with a soft, dry cloth.  
Do not use any abrasive or strong-chemical

household cleaners.

Thank you for your purchase  
Stores | catalog | [www.potterybarn.com](http://www.potterybarn.com)