

P O T T E R Y B A R N

Seashell Door Knocker Mounting Instructions

This item is usually mounted to the front door of a home; however it can be mounted at any location as desired. The below instructions are directed to mounting the knocker to a wooden door.


It is important to use the proper hardware for your door type. Most doors will be made from solid wood, but some may be made from metal or other materials. If your door is made from a material other than solid wood, please consult your local hardware store to determine the appropriate hardware required for mounting this item.

Parts Included:

1 Seashell Door Knocker (B)

Hardware Enclosed

2 Screws (A)




Tools Recommended (not included):

Phillips Screwdriver

Power Drill and 5/32" drill bit

Mounting Instructions:

- 1) Determine the desired mounting location on the door. This will typically be centrally located. Place the Knocker against the door and use it as a template by Marking the door through the two mounting holes Located on the knocker using a pen or a pencil.
- 2) Use a level to make sure that the two marks are Vertically true and adjust if necessary.
- 3) Depending on the type of wood your door is made from, you may have to create pilot holes before Securing the screws. Some wood is too hard for the screws to penetrate without pilot holes. To do so, use A power drill and a 5/32" drill bit to drill a straight hole at each mark.

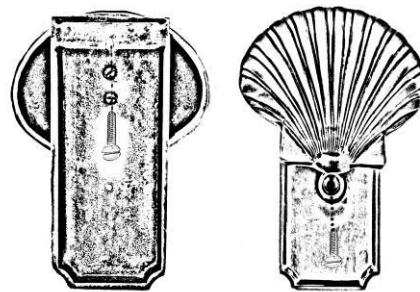

DRILL VERY CAREFULLY AND SLOWLY - ONLY DRILL ABOUT 1/2 INCH INTO THE DOOR - BE CAREFUL NOT TO DRILL DEEPER. If you do not feel comfortable Drilling these two holes, we recommend that you ask a professional to install this Product to your door.

- 4) Using a Phillips-head screwdriver, drive the screw into the wall at the location. The Screw should not Be flush to the wall. Leave a gap of about 1/8" between the head of screws and the wall.
- 5) Hang the Door knocker back key hole on the screw head, if it does not fit properly. You may need to Adjust the gap between the head of screw and the wall, and hang again.
- 6) Finally after hanging the door knocker tighten screw the lower hole of door knocker with the help of screw & screwdriver.
- 7) Use a level or measure up from the floor at each mark to ensure the bar will be level.

Care Instructions:

Wipe with a soft, dry cloth. Do not use household cleaners or abrasive

Thank you for your purchase
Stores | catalog | www.potterybarn.com